

Medientechnik

Übung – Java Swing

Heute

- (GUI-)Programmieren mit Eclipse
- Java Swing
 - Fenster erstellen
 - GUI-Komponenten hinzufügen
 - Layout-Manager nutzen



Links

<http://download.oracle.com/javase/tutorial/uiswing/>

<http://openbook.galileocomputing.de/javainsel/>

<http://zetcode.com/tutorials/javaswingtutorial/>

Eclipse

- Eclipse starten und Workspace festlegen
- Neues Java-Projekt anlegen
- 2 neue Klassen im default-package erstellen:
 - Yaca.java
 - View.java

Java – main-Methode

```
public class Yaca {  
  
    public static void main(String[ ] args) {  
  
        View yacaView = new View( );  
        yacaView.setVisible(true);  
    }  
}
```

Swing - JFrame

```
import javax.swing.*;
```



```
public class View extends JFrame {
```

```
    public View() {
```

```
        this.setTitle("YetAnotherCalculator");
```

```
        this.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
```

```
}
```

```
}
```

View.java

Swing - JPanel

```
import javax.swing.*;
```



```
public class View extends JFrame {
```

```
    public View() {
```

```
        this.setTitle("YetAnotherCalculator");
```

```
        this.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
```

```
        JPanel contentAll = new JPanel();
```

```
        contentAll.setLayout(new BorderLayout());
```

```
}
```

```
}
```

View.java

Swing – JButton

```
import java.awt.*;  
import javax.swing.*;
```

```
public class View extends JFrame {
```

```
    public View() {
```

```
        [...]
```


```
        JButton start = new JButton("Start");  
        JButton clear = new JButton("Clear");  
        contentAll.add(start, BorderLayout.SOUTH);  
        contentAll.add(clear, BorderLayout.SOUTH);
```

```
    this.setContentPane(contentAll);
```

```
    this.pack();
```

```
}
```

```
}
```



View.java

Swing – JButton

```
import java.awt.*;
import javax.swing.*;

public class View extends JFrame {

    public View() {
        [...]
        JButton start = new JButton("Start");
        JButton clear = new JButton("Clear");

        JPanel contentButtons = new JPanel();
        contentButtons.setLayout(new FlowLayout());
        contentButtons.add(start);
        contentButtons.add(clear);

        contentAll.add(contentButtons, BorderLayout.SOUTH);

        this.setContentPane(contentAll);
        this.pack();
    }
}
```



View.java

Swing – JTextField & JComboBox

```
import java.awt.*;
import javax.swing.*;
```



```
public class View extends JFrame {
```

```
    public View() {
        [...]
```

```
        JTextField firstInput      = new JTextField(5);
        JTextField secondInput     = new JTextField(5);
        JTextField result          = new JTextField(5);
        String[] methods           = { "+" , "-" , "*" , "/" };
        JComboBox methodBox        = new JComboBox(methods);
```

```
        this.setContentPane(contentAll);
        this.pack();
    }
}
```

View.java

Swing – JTextField & JComboBox


```
import java.awt.*;
import javax.swing.*;

public class View extends JFrame {
```

```
    public View() {
        [...]
```

```
        JPanel contentInput = new JPanel(new FlowLayout());
        contentInput.add(firstInput);
        contentInput.add(methodBox);
        contentInput.add(secondInput);
        contentInput.add(new JLabel( "=" ));
        contentInput.add(result);
        contentAll.add(contentInput, BorderLayout.CENTER);
```

```
    this.setContentPane(contentAll);
    this.pack();
}
```

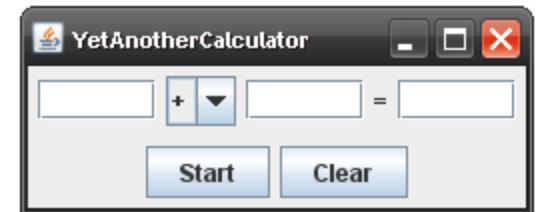

View.java

Swing – default-Werte ändern


```
import java.awt.*;
import javax.swing.*;

public class View extends JFrame {

    public View() {
        [...]

        firstInput.setText( "0" );
        secondInput.setText( "0" );
        result.setText( "-" );
        result.setEditable( false );
        methodBox.setSelectedIndex( 2 );

        this.setContentPane(contentAll);
        this.pack();
    }
}
```

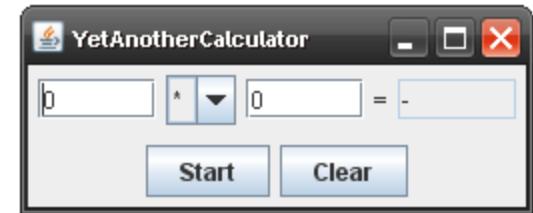

View.java

Swing – Window-Position

```
import java.awt.*;
import javax.swing.*;

public class View extends JFrame {

    public View() {
        [...]

        this.setContentPane(contentAll);
        this.pack();

        this.setLocation(100, 100);
    }
}
```

View.java